

# JK Products & Services, Inc

## **ERGOLINE ESSENCE 48**




Power consumption rating	8,800 W
Rated frequency	60 Hz
Rated voltage	230 V
Rated breakers	30 amp 3-pole or 60 amp 2-pole
Rated amp draw 3 Ø	24
Rated amp draw 1 Ø	40
Mains Power Connection*	The unit is configured from the factory for connection to 3-Phase power. A 1" liquid-tight connector is provided <b>See note for wiring</b>
Noise level 1m away from device	<71.6 dB
Noise level inside the device	<70 dB
Load on the acrylic panel	max. 330 lb
Weight	approx. 667 lb
Operating temperature	59-89 °F
Unit footprint**	82 11/16" X 94 1/2"
Number of body lamps	48 @ 200W 2M


\*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.

\*\* Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

# JK Products & Services, Inc

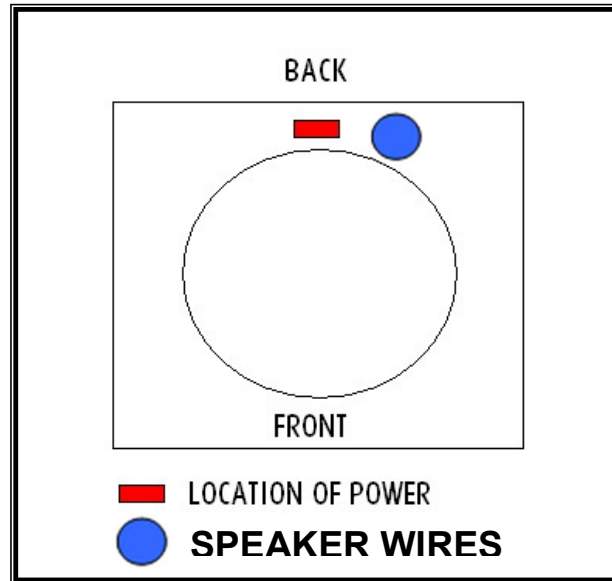

## ACTUAL DIMENSIONS

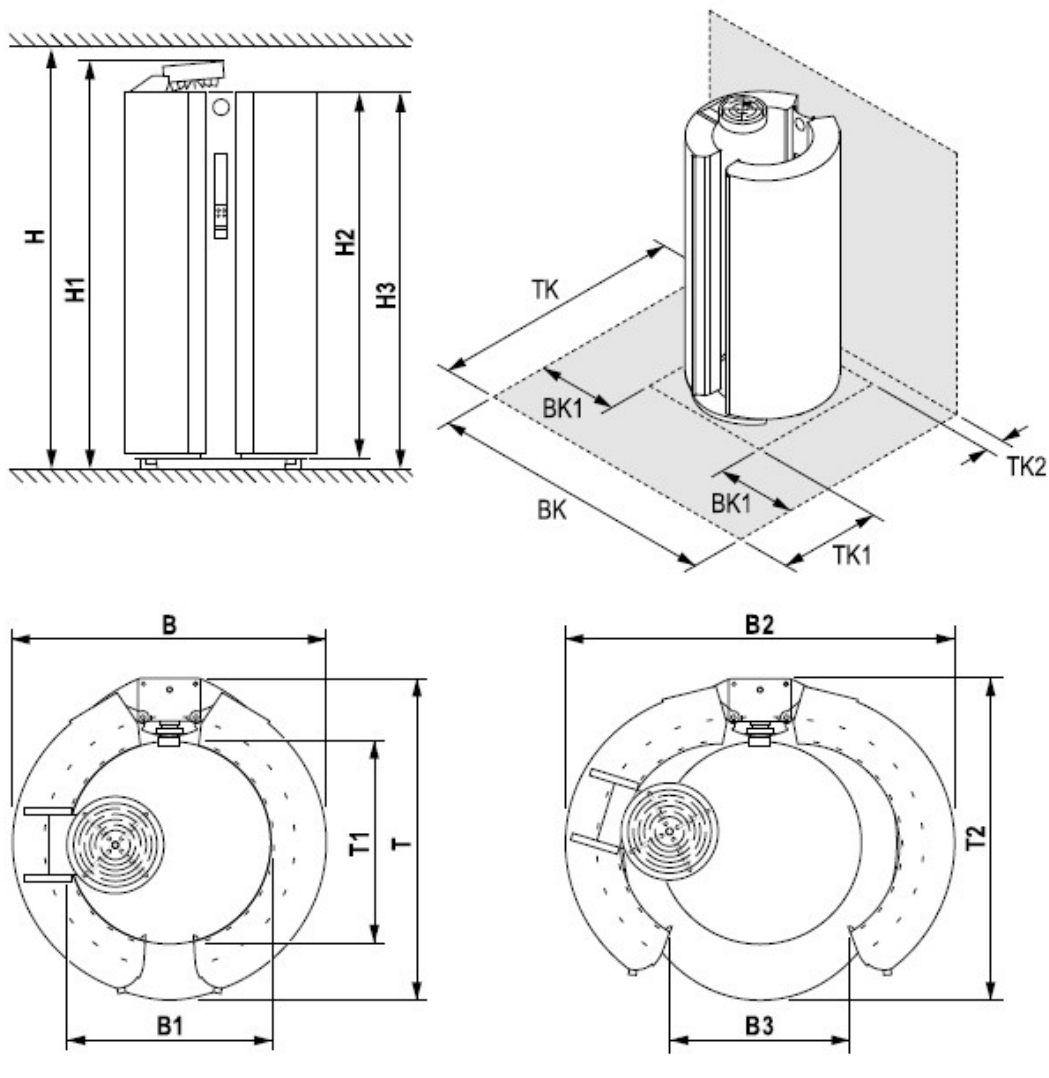

# JK Products & Services, Inc

B =	42 15/16 in	1,090 mm
B1 =	27 9/16 in	7,00 mm
B2 =	53 2/16 in	1,350 mm
B3 =	24 7/16 in	620 mm
T =	43 5/16 in	1,100 mm
T1 =	27 9/16 in	700 mm
T2 =	43 5/16 in	1,100 mm
H =	91 5/16 in	2,320 mm
H1 =	89 6/16 in	2,270 mm
H2 =	80 11/16 in	2,050 mm
H3 =	83 14/16 in	2,130 mm
BK =	82 11/16 in	2,100 mm
BK1 =	14 12/16 in	375 mm
TK =	94 1/2 in	2,400 mm
TK1 =	39 6/16 in	1,000 mm
TK2 =	11 13/16 in	300 mm

---